LINEAR SHOWER DRAIN


ALFA

TECHNICAL DATA SHEET

48 L/MIN | AISI 304 | DUAL-FLAP



DIMENSIONAL DRAWING

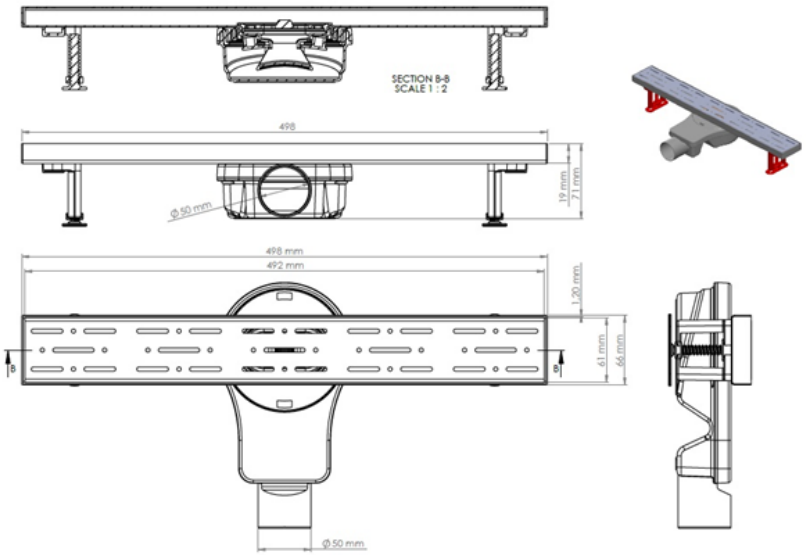

Nominal 50 cm ALFA model shown. All dimensions are in millimetres. Drawing not to scale.

AVAILABLE SIZES

NOMINAL	OVERALL L	GRATE L
20 cm	198 mm	192 mm
30 cm	298 mm	292 mm
40 cm	398 mm	392 mm
50 cm	498 mm	492 mm
60 cm	598 mm	592 mm
70 cm	698 mm	692 mm
80 cm	798 mm	792 mm

COMMON: Ø50 | W 66/61 mm | H 71 mm | 48 L/min

MATERIALS & CONSTRUCTION

- **ROTATABLE BODY**
  Original high-grade ABS
- **CHANNEL / FRAME**
  AISI 304 stainless steel - 1.2 mm
- **GRATE**
  AISI 304 stainless steel - 1.0 mm
- **PROTECTION**
  Dual non-return flaps + S-type water seal

FUNCTIONAL PERFORMANCE

1 48 L/min high-flow discharge
Efficient water evacuation for modern shower areas.

2 Dual-flap barrier
Helps prevent sewer insects and similar pests from entering through the drainage line.

3 S-type water seal
The rotatable siphon body retains water inside its S-profile to block sewer gases and unpleasant odours.

4 Installation flexibility
Rotatable Ø50 mm side outlet and adjustable feet support accurate positioning on site.

! CARE & MAINTENANCE WARNING

- Do not use hydrochloric acid, drain openers, chlorine bleach, abrasive powders or strongly acidic / alkaline chemicals.
- Use a pH-neutral cleaner with a soft cloth or sponge. Rinse thoroughly with clean water and dry after cleaning.
- Remove cement, grout and construction residues immediately. Inspect and clean the grate, water seal and dual flaps periodically.