LINEAR SHOWER DRAIN


# GALA

TECHNICAL DATA SHEET

**48 L/MIN | TILE-IN | DUAL-FLAP**



## DIMENSIONAL DRAWING

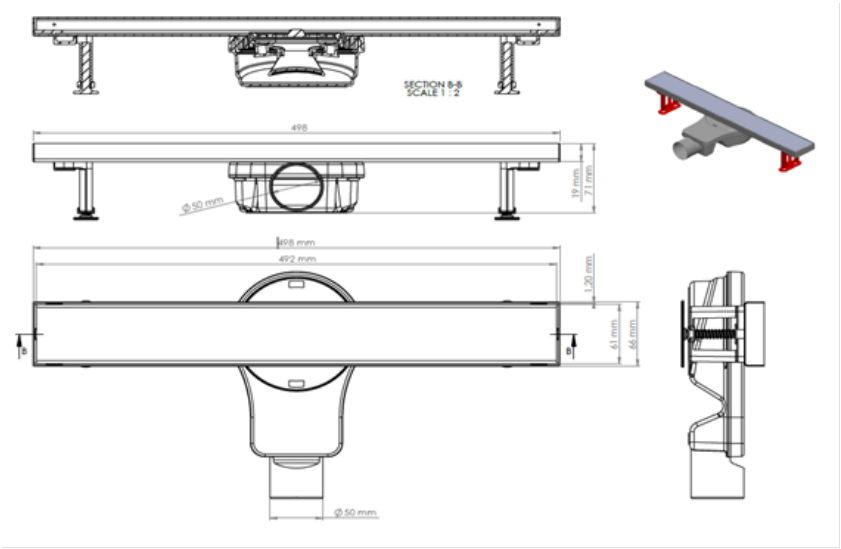


Nominal 50 cm GALA model shown. All dimensions are in millimetres. Drawing not to scale.

## AVAILABLE SIZES

| NOMINAL | OVERALL L | GRATE L |
|---|---|---|
| **20 cm** | 198 mm | 192 mm |
| **30 cm** | 298 mm | 292 mm |
| **40 cm** | 398 mm | 392 mm |
| **50 cm** | 498 mm | 492 mm |
| **60 cm** | 598 mm | 592 mm |
| **70 cm** | 698 mm | 692 mm |
| **80 cm** | 798 mm | 792 mm |

**COMMON: Ø50 | W 66/61 mm | H 71 mm | 48 L/min**

## MATERIALS & CONSTRUCTION

- **ROTATABLE BODY**
  Original high-grade ABS
- **CHANNEL / FRAME**
  AISI 304 stainless steel - 1.2 mm
- **GRATE**
  AISI 304 stainless steel - 1.0 mm
- **PROTECTION**
  Dual non-return flaps + S-type water seal

## FUNCTIONAL PERFORMANCE

**1 Tile-in architectural finish**
The recessed tray accepts a cut-to-size ceramic tile for a clean, continuous floor appearance.

**2 48 L/min high-flow discharge**
Efficient water evacuation for modern shower areas.

**3 Dual-flap barrier**
Helps prevent sewer insects and similar pests from entering through the drainage line.

**4 S-type water seal**
The rotatable siphon body retains water inside its S-profile to block sewer gases and unpleasant odours.

## ! CARE & MAINTENANCE WARNING

- Do not use hydrochloric acid, drain openers, chlorine bleach, abrasive powders or strongly acidic / alkaline chemicals.
- Use a pH-neutral cleaner with a soft cloth or sponge. Rinse thoroughly with clean water and dry after cleaning.
- Remove cement, grout and construction residues immediately. Inspect and clean the grate, water seal and dual flaps periodically.