LINEAR SHOWER DRAIN


LUNA

TECHNICAL DATA SHEET

ABS BODY | MEMBRANE-READY | DUAL-FLAP



DIMENSIONAL DRAWING

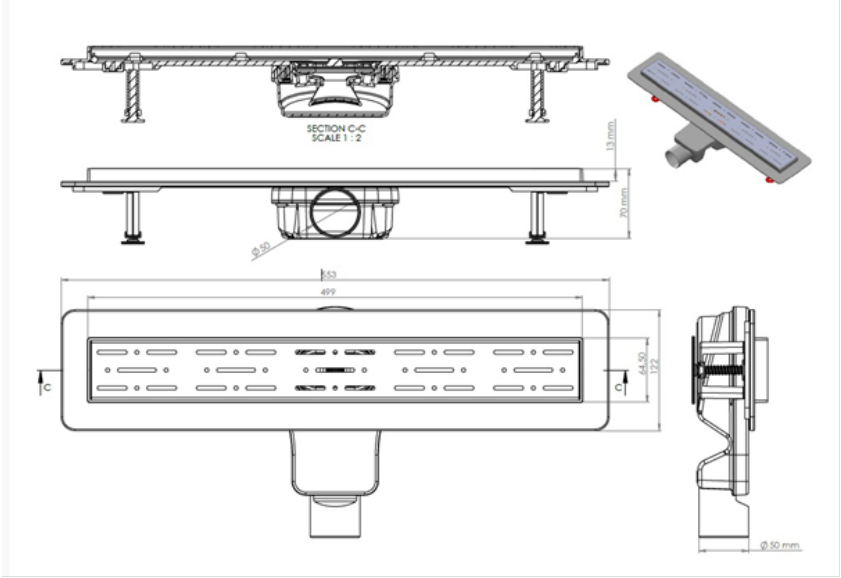

Nominal 50 cm LUNA model shown. All dimensions are in millimetres. Drawing not to scale.

AVAILABLE SIZES

NOMINAL	OVERALL L	GRATE L
30 cm	353 mm	299 mm
40 cm	453 mm	399 mm
50 cm	553 mm	499 mm
60 cm	653 mm	599 mm
80 cm	853 mm	799 mm

COMMON: Ø50 | W 142/64.5 mm | H 70 mm | 48 L/min

MATERIALS & CONSTRUCTION

- **CHANNEL BODY**
  Original high-grade ABS
- **GRATE**
  AISI 304 stainless steel - 1.0 mm
- **SIDE FLANGES**
  Integral ABS - membrane ready
- **PROTECTION**
  Dual non-return flaps + S-type water seal

FUNCTIONAL PERFORMANCE

1 Durable ABS channel body

The channel and integrated side flanges are produced from high-grade ABS.

2 Membrane-ready side flanges

Wide integral flanges provide a suitable surface for applying the waterproofing membrane.

3 Dual-flap barrier

Two internal non-return flaps help block sewer insects and unpleasant odours.

4 S-type water seal

The rotatable siphon retains water inside its S-profile for additional protection against sewer gases.

! CARE & MAINTENANCE WARNING

- Do not use hydrochloric acid, drain openers, chlorine bleach, abrasive powders or strongly acidic / alkaline chemicals.
- Use a pH-neutral cleaner with a soft cloth or sponge. Rinse thoroughly with clean water and dry after cleaning.
- Remove cement, grout and construction residues immediately. Inspect and clean the grate, water seal and dual flaps periodically.