LINEAR SHOWER DRAIN


QUATTRO

TECHNICAL DATA SHEET

STAINLESS STEEL | MEMBRANE-READY | DUAL-FLAP



DIMENSIONAL DRAWING

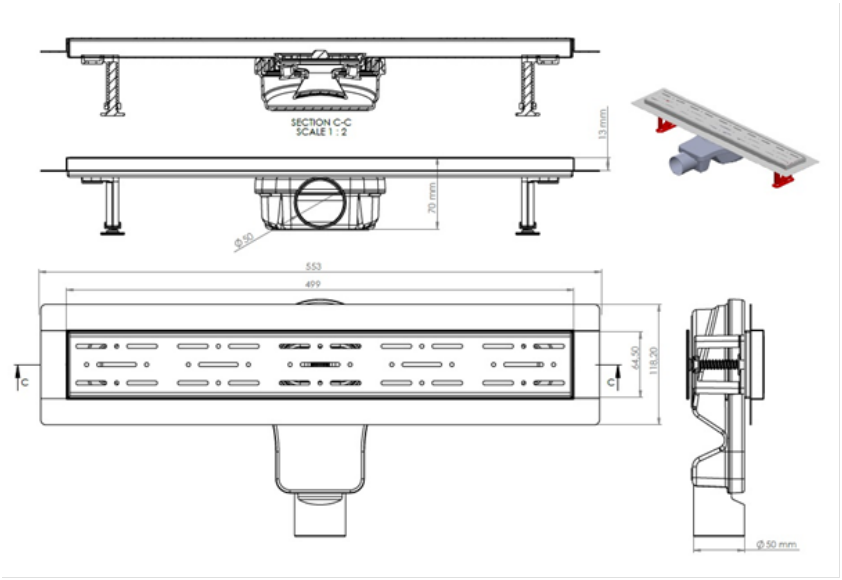

Nominal 50 cm QUATTRO shown. Dimensions in millimetres. Drawing not to scale.

AVAILABLE SIZES

NOMINAL	OVERALL L	GRATE L
30 cm	353 mm	299 mm
40 cm	453 mm	399 mm
50 cm	553 mm	499 mm
60 cm	653 mm	599 mm
70 cm	753 mm	699 mm
80 cm	853 mm	799 mm

COMMON: Ø50 | W 118.5 mm | H 70 mm

MATERIALS & CONSTRUCTION

- **CHANNEL BODY**
  Stainless steel - 1.2 mm
- **GRATE**
  Stainless steel - 1.0 mm
- **SIDE FLANGES**
  Stainless steel - membrane ready
- **PROTECTION**
  Dual flaps + S-type water seal

FUNCTIONAL PERFORMANCE

1 All-stainless drainage surface
The 1.2 mm channel body, 1.0 mm grate and side flanges form a robust stainless-steel assembly.

2 Membrane-ready side flanges
Wide stainless flanges provide a secure working surface for waterproofing-membrane application.

3 Dual-flap barrier
Two non-return flaps help prevent sewer insects and similar pests from entering the shower area.

4 S-type water seal
The rotatable siphon retains water inside its S-profile to block sewer gases and unpleasant odours.

! CARE & MAINTENANCE WARNING

- Do not use hydrochloric acid, drain openers, chlorine bleach, abrasive powders or strongly acidic / alkaline chemicals.
- Use a pH-neutral cleaner with a soft cloth or sponge. Rinse thoroughly with clean water and dry after cleaning.
- Remove cement and grout residues immediately. Periodically clean the grate, S-type water seal and dual flaps.