LINEAR SHOWER DRAIN


SLIMEX

TECHNICAL DATA SHEET

SLIM PROFILE | MEMBRANE-READY | SINGLE-FLAP



DIMENSIONAL DRAWING

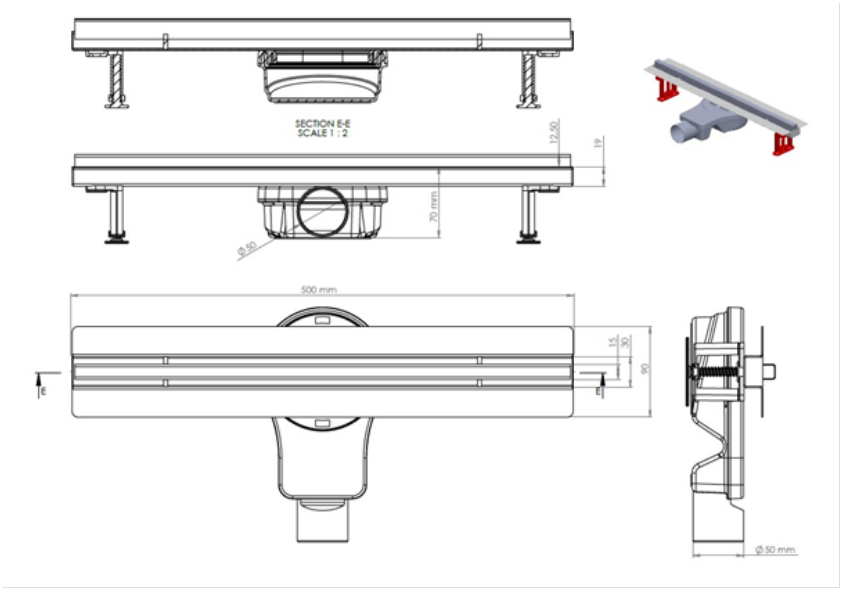

Nominal 50 cm SLIMEX model shown. All dimensions are in millimetres. Drawing not to scale.

AVAILABLE SIZES

NOMINAL	OVERALL L	OVERALL W
40 cm	400 mm	80 mm
50 cm	500 mm	80 mm
60 cm	600 mm	80 mm
70 cm	700 mm	80 mm
80 cm	800 mm	80 mm

COMMON: Ø50 | W 80 mm | H 70-82.5 mm | 48 L/min

MATERIALS & CONSTRUCTION

- **CHANNEL BODY**
  AISI 304 stainless steel - 1.2 mm
- **GRATE**
  AISI 304 stainless steel - 1.0 mm
- **SIDE FLANGES**
  Stainless steel - membrane ready
- **PROTECTION**
  ABS S-type body + single non-return flap

FUNCTIONAL PERFORMANCE

1 Slim architectural profile

A narrow channel design creates a refined and minimal line in the shower floor.

2 Membrane-ready side flanges

Wide stainless steel flanges provide a suitable surface for applying the waterproofing membrane.

3 Single-flap odour barrier

The internal non-return flap helps block sewer insects and unpleasant odours.

4 S-type water seal

The rotatable siphon retains water inside its S-profile for additional protection against sewer gases.

! CARE & MAINTENANCE WARNING

- Do not use hydrochloric acid, drain openers, chlorine bleach, abrasive powders or strongly acidic / alkaline chemicals.
- Use a pH-neutral cleaner with a soft cloth or sponge. Rinse thoroughly with clean water and dry after cleaning.
- Remove cement, grout and construction residues immediately. Inspect and clean the grate, water seal and single flap periodically.